

## Model: 2300 Series Handset Phones Simplified Programming Instructions

Phone has been preset to Ring down phone systems with a 5 min. conversation.  
The following are all separate steps and can be done in any order that you desire.

### 1. Programming Telephone Numbers

Note: When programming, ignore messages or busy tones from the phone system. Continue and finish programming.

- Plug Phone line cord into active analog phone jack
- Press and hold Program button down and lift handset off hook then release Program button
- Press the “#” key 10 times, you will hear confirmation tones
- Press “3” then “#” then the phone number you wish to dial
- Press “\*” then “#” to exit Programming mode


### 2. Switchboard Telephone Line Programming

Note: When programming, ignore messages or busy tones from the phone system. Continue and finish programming.

- Plug Phone line cord into active analog phone jack
- Press and hold Program button down and lift handset off hook then release Program button
- Press the “#” key 10 times, you will hear confirmation tones
- Press “3” then “#” then press the access code for an outside line (usually 8 or 9)
- Press the “#” then “\*”, enter the number to be dialed
- Press “\*” then “#” to exit Programming mode
- The LED on the front of the phone will shut off.

### 3. Ring Down Telephone Line Programming

- Plug Phone line cord into active analog phone jack
- Press and hold Program button down and lift handset off hook then release Program button
- Press the “#” key 10 times, you will hear confirmation tones
- Press “3” then “#”
- Press the “#” then “\*\*”
- Press “\*” then “#” to exit Programming mode

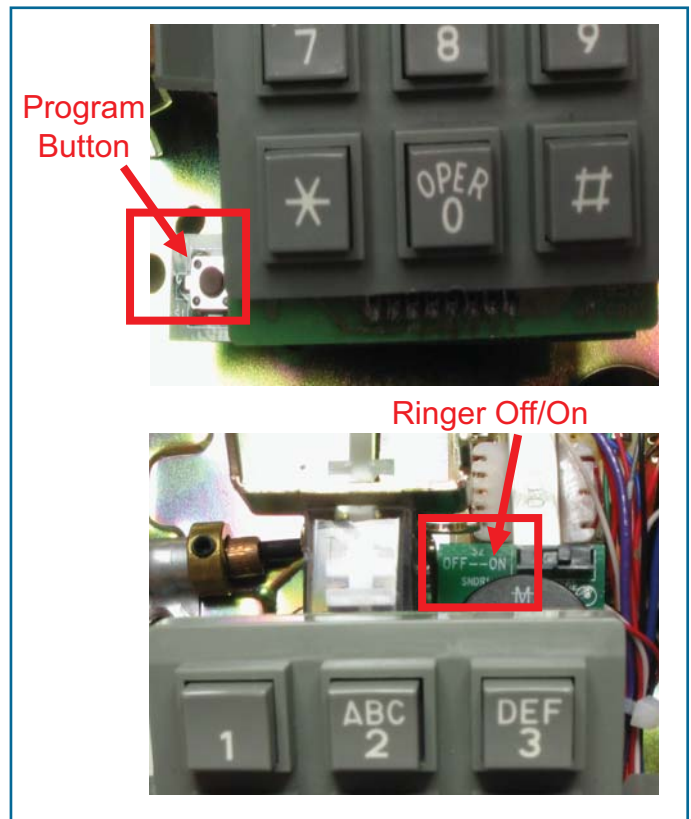

For any other questions that you may have please call us at  
866-850-8854 ext. 3 between the hours of 7:30 and 4:00 CST Monday - Friday.  
Having problems before or after this time, email us your questions at [help@rathsecurity.com](mailto:help@rathsecurity.com)

